




# 4860 "S" Hanger Table

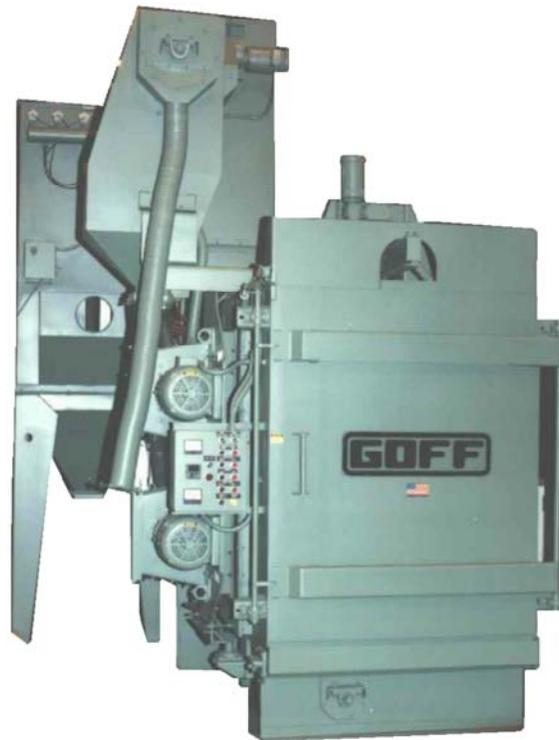

# **GOFF**®

*"Blasting Solutions"*

## FEATURES

**2 - 7½ HP Blast Wheels**  
**Single 20" Lip Air Wash Separator**  
**4,000 Lb. Hook Capacity**  
**Pitless Design**  
**Machine Warranty**

**52" Work Table**  
**Rotary Screen**  
**Oscillating Blast Wheels**  
**Abrasive Resistant Liners**

# SPECIFICATIONS—4860S Hanger Table

## EQUIPMENT DIMENSIONS

	4860S HT	DFO 2-4
Length	8'8"	5'2"
Width	8'8"	3'9"
Height	14'4"	9'11"
Weight	6,000 lbs.	1,125 lbs.

## TWO AIRLESS BLAST UNITS (STANDARD)

**WHEELS:** The direct drive blast wheel is C-faced mounted and revolves at 3600 RPM for maximum abrasive velocity. The blast wheel is available in 12", 13.5" and 15" diameters. Balanced wheel components assure smooth operation.

**BLADES:** Cast from abrasive resistant alloy to insure maximum life. The unique blade design allows for easy blade replacement.

**CONTROL CAGE:** Dial type cage.

**WHEEL HOUSING:** Fabricated from 1/4" wear resistant steel plate. Housing is fully incased with replaceable wear resistant liners.

## CABINET CONSTRUCTION

**CABINET**—Pitless type, all welded structurally reinforced cabinet is fabricated from 1/2" abrasive resistant plate in the blast area.

**WORK TABLE:** 52" diameter work table is constructed of 1/2" steel plate and is covered with a removable abrasive resistant liner. Table revolves on a 2" diameter shaft supported by a thrust bearing. Table revolves on a 2" diameter shaft supported by a thrust bearing. Maximum load capacity of table is 4,000 pounds and revolves at 7 RPM.

**AREA CAPACITY:** Maximum area provided for material to be blasted is 48" diameter x 60" high.

**Goff, Inc.**  
12216 NS352  
PO Box 1607  
Seminole, Oklahoma 74818-1607  
USA

Tel 405-382-6900  
Tel 800-654-4633  
Fax 405-382-7013

www.goff-inc.com  
goff@goff-inc.com

**POWER LOCK DOOR:** Electronically controlled with fingertip action. Pneumatically operated air cylinder provides locking action of door. The door is fabricated from 3/8" wear resistant plate. The unique lapped door seal prevents abrasive escape.

**BLAST UNIT MOUNTING:** Unique mounting allows blast unit to be pivoted up to 30° included angle to assure full coverage of all parts to be cleaned. Electrically controlled with adjustable timer, the pivoting action power is controlled by a pneumatic cylinder.

**SPINDLE:** Continual rotation of load carrying I-beam spindle during blasting operation provides full exposure of parts to the blast pattern. I-beam spindle will accommodate most trolleys designed for use with 6" 12.5 I-beam. Maximum load capacity of spindle is 4,000 lbs. and rotates at 4.3 RPM.

## ABRASIVE RECYCLING SYSTEM

**SCREW CONVEYORS:** Screw conveyors constructed with two heavy duty sectional flights.

**ELEVATOR:** Centrifugal discharge belt and bucket elevator is rigid and dust tight. Quick clamped removable doors permit service and inspection. All shaft bearings are exterior mounted for extended life. Screw adjusted shaft take-ups provide positive belt alignment.

**SEPARATOR:** Single 20" lip separator. Adjustable abrasive spreader and refuse gate assures thorough air washing of abrasive for maximum contaminate removal.

**ABRASIVE SCREENING:** Primary screen in cabinet protects screw conveyor and elevator from large objects. A perforated rotary screen between elevator and separator automatically removes small foreign objects from the system.

**CABINET VENTILATION:** Air inlet and outlet positioned to provide maximum dust evacuation of blast chamber.

**ABRASIVE REQUIRED:** 2,000 lbs.

**ABRASIVE CONTROL:** Fully ad-

justable butterfly valves provide precise flow control of abrasive to each blast wheel. Totally enclosed design assures maximum noise suppression.

## VENTILATION FEATURES (Option)

**1216DC:** 1,500 CFM dust collector is fully self contained and optional. Contains 8 cartridges which are cleaned automatically by reverse pulse system. Requires 90-100 PSI of air at 7.5 CFM. Free standing and accommodates a 55 gallon drum.

## ELECTRICAL COMPONENTS

NEMA type 12 electrical enclosure, fusible disconnect switch, thermal overload protection on all electric motors, 230/460 volt primary, 115 volt secondary control transformer, blast wheel motor ammeters, oil tight push buttons, hour meter, automatic reset abrasive cycle timer. Independent blast wheel operation is standard.

Full Load Amperes (excludes Dust Collector): 230V/3Ph/60Hz—55 AMPS, 460V/3Ph/60Hz—27.5 AMPS

## ELECTRIC MOTORS

All motors TEFC ball bearings, 230/460 volt, 3 phase.

## SAFETY FEATURES

Blast wheels operational only when door is securely closed. Abrasive valves operative only during timed blast cycle. Emergency stop button provided on control panel.

**NOISE LEVEL:** Approx. 85 DB

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*

# GOFF®

*"Blasting Solutions"*

